

# DATA STATION X-SERIE COMMERCIAL

Item No.: 592.724



Actual product may vary

## DESCRIPTION OF FUNCTIONS

The measuring equipment control cabinet for centrally recording and processing all system data in your commercial PV power plant.

- Centralized data acquisition and communication with VCOM
- Depending on the system topology blue'Logs, MX-Modules and further components can be built in if required
- Cost-optimized all-in-one solution due to direct connection of communication lines
- Application area Indoor and Outdoor for moderate climate conditions

## TECHNICAL DATA

Supply voltage:	100 V AC to 230 V AC / 16 A
Current consumption without ext. devices:	Max. 0.59 A
Protection class:	IP 66
UV resistant:	Yes
Operating temperature:	-15 °C to 45 °C
Dimensions (H x W x D):	600 x 500 x 230 mm
Weight:	15.8 kg
Installation:	Wall installation

## INTERNAL POWER SUPPLY

Components:	Power supply unit 24 V DC $\pm 1$ %, 2.5 A
Nominal input voltage range AC:	100 V AC to 240 V AC
Input voltage range AC:	85 V AC to 264 V AC
Efficiency:	> 90 % (for 230 V AC and nominal values)

Components:	UPS with integrated power storage 24 V DC, 2.5 A
Input voltage DC:	24 V DC
Capacity:	0.8 Ah
Efficiency:	> 95 % (Mains operation, with charged power storage)

## CABLE SCREW CONNECTIONS

1 x M25 incl. splitted sealing insert (9 mm bis 17 mm / 4 mm bis 6 mm) for Ethernet  
 1 x M20 (6 mm bis 13 mm) for Power supply  
 7 x M16 (4,5 mm bis 10 mm) for Sensors

## COMMUNICATION

Type:	RS485 Modbus / 2 wires Ethernet
-------	------------------------------------

## EQUIPMENT

Power supply unit 24 V DC, 2.5 A

UPS with integrated power storage 24 V DC, 2.5 A, 0.8 Ah

Top-hat rail socket (optional)


- Socket extension GER (Item No.: 592.724 100)
- Socket extension UK (Item No.: 592.724 101)
- Socket extension ITA (Item No.: 592.724 102)
- Socket extension USA (Item No.: 592.724 103)
- Socket extension IN (Item No.: 592.724 104)
- Socket extension FR (Item No.: 592.724 105)
- Socket extension CH (Item No.: 592.724 106)

Prepared for:

- 1 blue'Log basic module (X-1000 / X-3000 / X-6000)
- Up to 4 extension modules (max. 2 MX-Module Multi I/O)

If required, additional components can be implemented as a variant

## SCHEMATIC DIAGRAMS

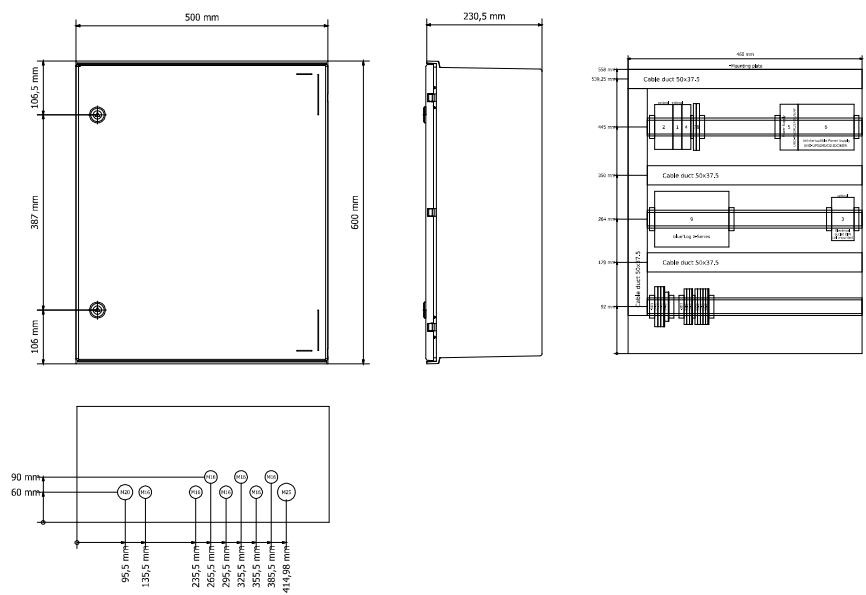

meteocontrol GmbH | Spicherer Straße 48 | 86157 Augsburg | Germany | Telephone +49 (0)821 34666 - 0 | Fax +49 (0)821 34666 - 11  
 E-mail [info@meteocontrol.com](mailto:info@meteocontrol.com) | Web [www.meteocontrol.com](http://www.meteocontrol.com)