

# ENERGY METER IEM3155 3-PHASE MODBUS

Item No.: 424,206



#### **DESCRIPTION OF FUNCTIONS**

The energy meter offers all the essential measurement functions (for example, current, voltage and energy) that are needed for monitoring three-phase electrical installations.

The main functions of the energy meter are:

- Measuring voltage, current, active and reactive power, as well as active and reactive energy
- Can be used as a bidirectional meter for measuring grid feed-in and load
- Multi-tariff measurement
- MID approval
- Pulse output
- Display (current, voltage and power measurements)
- Communication via Modbus RTU
- Direct current measurement of up to 63 A

### TECHNICAL DATA

Compatibility WEB'log – IEM3155: From meter firmware 1.08 Conductor systems: 1P + N (100...277 V AC)

3P (173...480 V AC) 3P + N (173...480 V AC)

Current measurement range: 0.5...63 A

Precision class: Active power: Class B as per EN 50470-3

Active power: Class 1 as per IEC 61557-12 Active power: Class 1 as per IEC 62053-21

 $\begin{array}{ccc} \text{Rated current in operation } [I_n]: & 63 \text{ A} \\ \text{Nominal voltage:} & 173...480 \text{ V} \\ & & 100...277 \text{ V} \\ \text{Grid frequency:} & 50 \text{ Hz} / 60 \text{ Hz} \\ \end{array}$ 

$$\label{eq:reference} \begin{split} & \text{Reference, maximum current (active power):} & \quad I_{\text{ref}} = 10 \text{ A, } I_{\text{max}} = 63 \text{ A} \\ & \text{Startup / minimum current (active power):} & \quad I_{\text{st}} = 0.04 \text{ A, } I_{\text{min}} = 0.5 \text{ A} \\ & \text{Power consumption:} & \quad < 10 \text{ VA at } 63 \text{ A} \\ & \text{Sampling rate:} & \quad 32 \text{ samplings/cycle} \end{split}$$

Tariff input: 4 tariffs

Communication interface: RS485, Modbus RTU 9,600, 19,200 and 38,400 baud odd/even or no parity

Inputs: 1 digital input 0...5 V DC / 11...40 V DC (rated voltage 24 V DC)

Outputs: 1 digital output (static) 5...40 V DC < 50 mA

Display type: LCD display

Active power display range: 8 + 1 digits up to 99,999,999.9 [kWh]



#### *INTERFACES*

#### Communication interface

No. of ports: 1 RS485
Protocol: Modbus RTU

Baud rate: 9,600, 19,200, 38,400

Selectable address range: 1...247

Data format: 8N1, 8E1, 8O1

Insulation: 4.0 kV<sub>eff</sub>

#### Programmable digital output

Number: 1

Type: Normally open (NO) Load voltage: 5...40 V DCMaximum load voltage: 50 mAOutput resistor:  $0.1...50 \Omega$ Insulation:  $3.75 \text{ kV}_{\text{eff}}$ 

#### Programmable digital input

Number: 1

Type: Type 1 (IEC 61131-2)
Input: Voltage: max. 40 V DC
Current: max. 4 mA

Voltage OFF-position:0...5 V DCVoltage ON-position:11...40 V DCNominal voltage:24 V DCInsulation:3.75 kVeff

### **PRODUCT CERTIFICATES**

Product certificates: UL

CULus as per UL 61010-1 CE as per IEC 61010 MID as per EN 50470-3 MID as per EN 50470-1

#### MEASUREMENT VALUES RECORDED

 M\_AC\_U (1, 2, 3)
 Voltage (phase 1, 2, 3)

 M\_AC\_U\_L1L2
 Voltage (phase L1-L2)

 M\_AC\_U\_L2L3
 Voltage (phase L2-L3)

 M\_AC\_U\_L3L1
 Voltage (phase L3-L1)

 M\_AC\_I (1, 2, 3)
 Current (phase 1, 2, 3)

 M\_AC\_P(1, 2, 3)
 Active power (phase 1, 2, 3)

 $\begin{array}{ll} M\_AC\_P & \text{Active power} \\ M\_AC\_Q & \text{Reactive power} \\ M\_AC\_S & \text{Apparent power} \end{array}$ 

 $\begin{array}{ll} M\_AC\_PF & cos \, \phi \\ M\_AC\_F & Frequency \end{array}$ 

M\_AC\_E\_EXP Active power (export)
M\_AC\_E\_IMP Active power (import)



#### INSTALLATION

Installation: DIN top-hat rail (TS 35)

IP protection class: IP20 (enclosure) as per IEC 60529
IP40 (front panel) as per IEC 60529

Overvoltage category: Ill as per DIN EN 60664-1

Operating temperature: -25...+55 °C Storage and transport temperature: -40...+85 °C


Relative humidity: 5...95 % (non-condensing)


Installed location: Only indoors, not for use in humid and wet areas

Installed height:  $\leq$  2,000 m above MSL Dimensions (W x H x D):  $90 \times 95 \times 69 \text{ mm}$ 

Weight: 466 g

## SCALE DRAWING



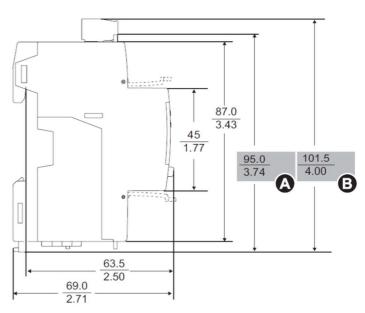

A: Without communications interface

B: With communications interface