

DATA STATION X-SERIES INDOOR

Item No.: 592.723



Actual product may vary

DESCRIPTION OF FUNCTIONS

The measuring equipment control cabinet for centrally recording and processing all system data in your PV power plant, for indoor use.

- Centralized data acquisition and communication with VCOM
- Depending on the system topology blue'Logs, MX-Modules and further components can be built in if required
- The pre-wired components allow quick installation and commissioning

TECHNICAL DATA:

Supply voltage:	100 V AC to 240 V AC / 16 A
Current consumption without ext. devices:	Max. 0.57 A
Protection class:	IP 65
UV resistant:	Yes
Operating temperature:	0 °C to 30 °C
Storage temperature:	-15 °C to 40 °C
Dimensions (H x W x D):	750 x 750 x 320 mm
Weight:	46.5 kg
Installation:	Wall installation

INTERNAL POWER SUPPLY

Components:	Power supply unit 24 V DC ± 1 %, 20 A
AC input voltage range:	85 V AC to 264 V AC
Input voltage (transient):	300 V AC
Efficiency:	>92 % (at 230 V AC and nominal values)

Components:	UPS unit 24 V DC, 5 A
AC input voltage range:	18 V AC to 30 V AC
Capacity:	7.2 Ah
Efficiency:	>98.7 %

CABLE SCREW CONNECTIONS

2 x M25 (for Ethernet insertion)
 2 x M32 (13 mm bis 21 mm)
 2 x M25 (11 mm bis 17 mm)
 2 x M20 (6 mm bis 13 mm)
 3 x M16 (3 mm bis 9 mm)

COMMUNICATION

Type:	RS485 Modbus / 2 wires Ethernet
-------	------------------------------------

EQUIPMENT

Power supply unit 24 V DC, 20 A

UPS unit 24 V DC, 5 A

Rechargeable battery module 7.2 Ah


5 port switch

Pre-wired for:

- 1 blue'Log basic module (XM)
- 1 MX-Module RS485/422
- 1 MX-Module Multi I/O

If required, additional components can be implemented as a variant or special model.

SCHEMATIC DIAGRAMS

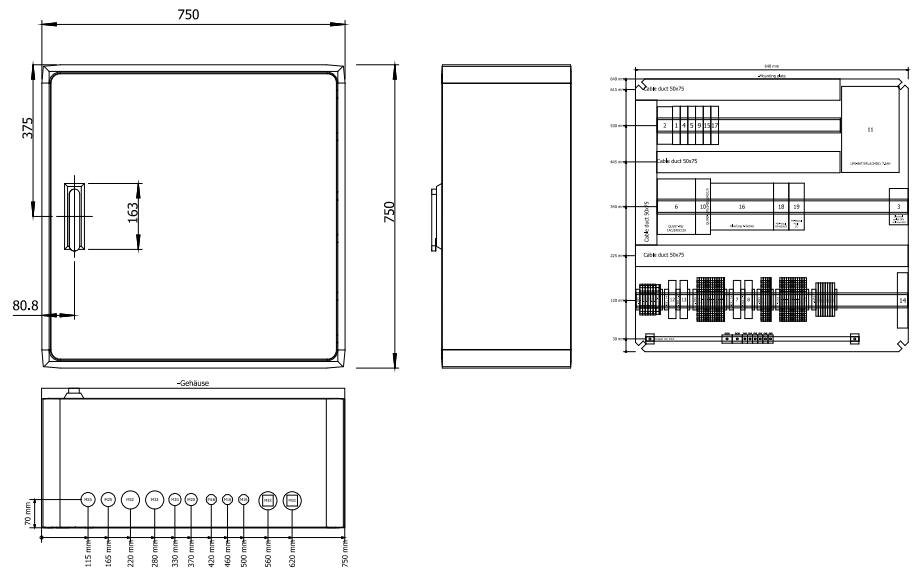

meteocontrol GmbH | Spicherer Straße 48 | 86157 Augsburg | Germany | Telephone +49 (0)821 34666 - 0 | Fax +49 (0)821 34666 - 11
 E-mail info@meteocontrol.com | Web www.meteocontrol.com